


Specifications – Timed Solenoid Drains

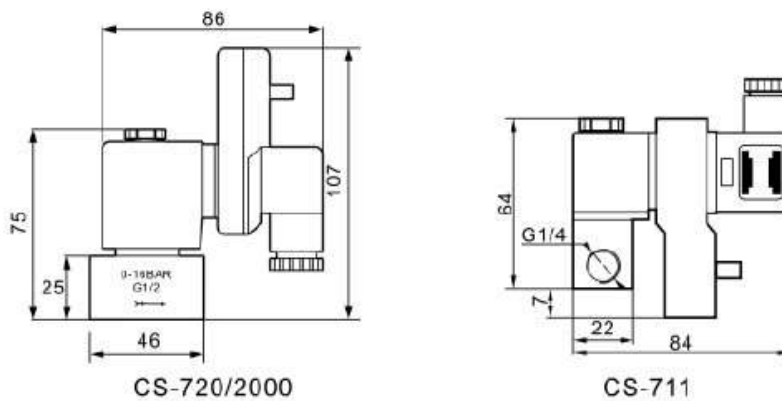

	CS-720	CS-2000	CS-711
Valve type	Two-position, two-way, direct acting solenoid valve		
Connection port	¼", 3/8", ½" (Female)		1/8", ¼"
Working Pressure	16bar, 80bar		16 bar
On time	0.5sec – 10sec	0.5sec – 99sec	2sec
Off time	0.5min – 45min	0.5min – 99min	0.5min – 120min
Ambient temp	-20C to +60C		
Valve body	Brass or Stainless steel (standard is brass)		
Orifice	1.9mm – 4.5mm		2mm
Insulation class	IP65 F Class, IP65 (with plug)		
Voltage	24vdc, 48vdc, 110v, 240v 50/60Hz		
Mounting	Multi-dirctional		